

# 9030 / 9030 IP65

small character inkjet printers ■ ■ ■



## Our technology ■ ■ ■

9000 Series printers offer the best balance between performance and flexibility in their segment for an easy integration in all manufacturing environments. Their state-of-the-art design requires minimal attention and provides high quality coding.

The continuous inkjet technology prints the best before dates, logos, alphanumeric text and 1D and 2D barcodes for food, beverage, pharmaceutical, cosmetic and electronic industries.

## Your benefits ■ ■ ■

**Simplicity** - Ergonomic design with intuitive user interface featuring shortcuts and direct access to consumables. Compact design and stand mounting option for easy integration into the production line.

**Performance** - Up to 8-line printing.  
High speed multi-line printing up to 5.5 m/s.  
Optional ethernet connectivity.

**Quality** - Automatic ink-pressure adjustment (Jet Speed Control) guaranteeing print quality.

**Uptime** - Unique head cleaning system to ensure trouble-free startup. Easy change of the consumables without stopping marking operations.

**Versatility** - Wide choice of options making integration onto most production lines efficient: mono- or twin-jet, 2 printing resolutions (71 and 115 dpi) and IP65 cabinet.



markem·imaje

the team to trust ■ ■ ■

## Print features ■ ■ ■

- Mono- or bi-jet printhead
- G head (printing resolution: 71 dpi) or M head (printing resolution: 115 dpi)
- Up to 8 lines of print
- Print speed: up to 5.5 m/s
- Font height: from 5 to 48 dots
- Character height: from 1.2 to 18.2 mm
- One and two-dimensional barcodes (Datamatrix)
- Wide choice of character (Latin, Arabic, Cyrillic, Greek, Japanese, Chinese, Hebrew, Korean...)

## Options ■ ■ ■

- IP65 (requires plant air)
- Ethernet connectivity
- Printhead pressurization kit
- 90° bent or side-mounted umbilical cable

## Operations ■ ■ ■


- Message library (up to 880 messages)
- International operator/machine interface (choice of 31 languages)
- Large, WYSIWYG, backlit, blue screen
- Integrated help for navigation and diagnostics
- Creation of logos directly on the operator/machine interface
- PCMCIA and Compact Flash cards reader
- IC60 ink circuit
- Jet Speed Control guarantees marking quality
- Automatic selection of fonts, depending on print speed and printhead/object distance
- Possibility to choose ink types: quick-drying, alcohol- and water-base
- 2 sealed cartridges, 0.8 liter each
- Quick connect/disconnect of accessories (photocell, encoder, alarm)
- RS-232/422 connectivity, parallel interface, many I/O possibilities to enable remote operation

## Other characteristics ■ ■ ■

- Weight: 19.5 kg
- 3-meter flexible umbilical cable
- Stainless steel cabinet
- Dust/humidity protection rating: IP54
- No plant air required
- Operating temperature range: 0° to 40° C, depending on ink used
- Humidity: 10% to 90% non-condensing
- Electrical power supply: 100-120 V or 200-240 V with automatic switching; frequency 50/60 Hz; power 60 VA

## Accessories ■ ■ ■

- Printer stand (stainless steel or aluminum)
- Printhead stand (stainless steel)
- Different printhead brackets
- Stainless steel printhead cover
- Photocell
- Encoder
- Alarm beacon (24 V)

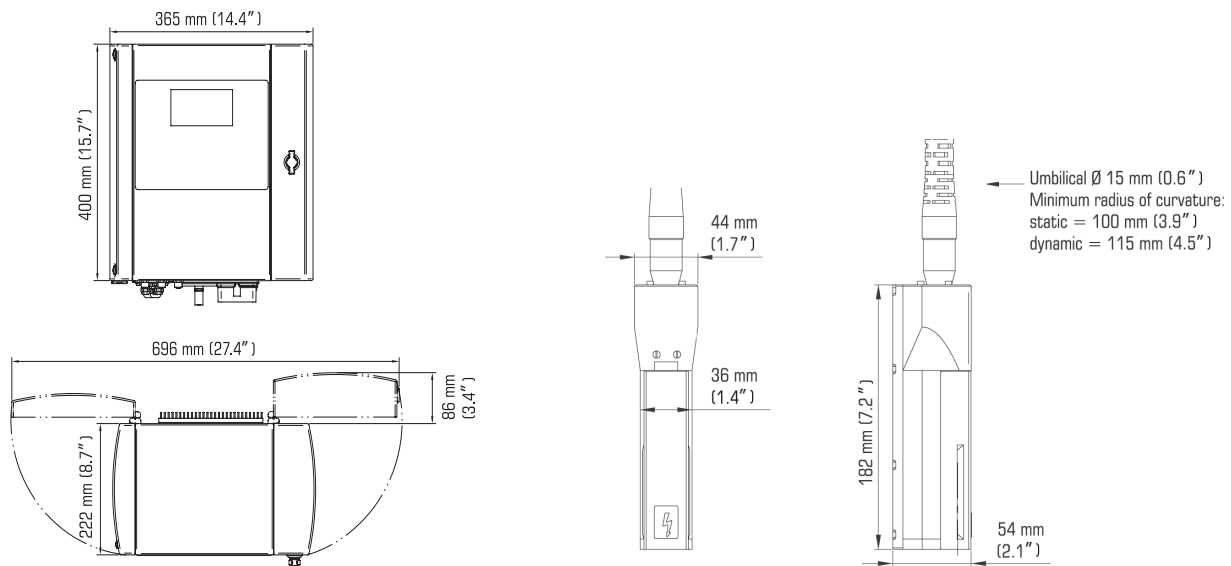

To learn more visit, [www.markem-imaje.com](http://www.markem-imaje.com)



We reserve the right to amend the design and/or specifications of our products without notice.

9, rue Gaspard Monge  
B.P. 110  
26501 Bourg-lès-Valence Cedex - France  
Tel.: +33 (0) 4 75 75 55 00  
Fax: +33 (0) 4 75 82 98 10

150 Congress Street  
Keene, NH 03431  
United States of America  
Tel.: +1 800-258-5356  
Fax: +1 603-357-1835

  
markem·imaje

A  Company